


Fire-Steel®



Patented **Fire-Rated** Generator Sub-Base Fuel Tanks

- UL Special Purpose Tank, listed and labeled Protected Secondary Containment Generator Base Tank (investigated using UL 2085).
- Two-hour fire rating, ballistics tested and vehicle impact resistant.
- Double-walled steel generator sub-base tank using lightweight concrete vaulted secondary containment system.
- Designed for environmental extremes with earthquake and hurricane tie-down restraint points and drillings for ground device attachment.
- Warranty includes primary and secondary tank systems as well as concrete vaulting.
- The Fire-Steel® sub-base tank allows for smaller site footprint and lower installation cost than stand-alone vaulted tanks.
- Generator sets weighing up to 61,900 pounds, with or without enclosures, may be mounted on top.
- Phoenix's coating system passed a 20,000-hour salt spray test and is in use in highly corrosive environments, including offshore oil platforms.

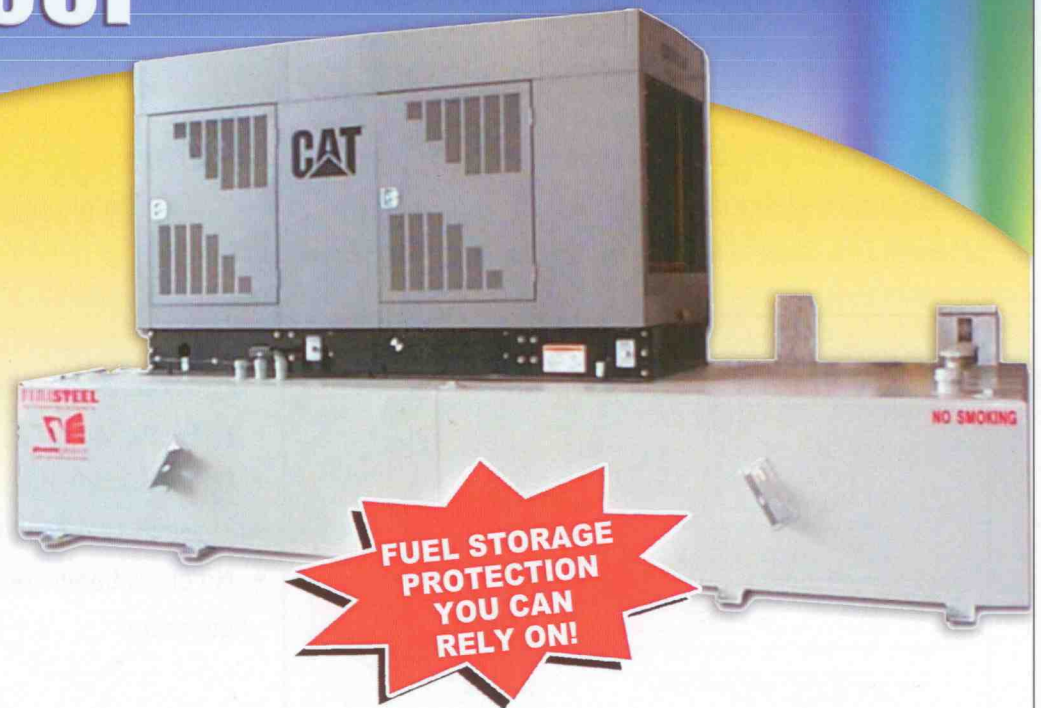